

# S14 REGULAR HOUSING

## 1x4 GPS Splitter

### DESCRIPTION

The S14 GPS Splitter is a one-input, four-output GPS splitter device. The typical application for this splitter allows an active GPS roof antenna input which is then split evenly between four receiving GPS units. The S14 can be configured to pass the DC from an RF output (OUT1) to the antenna input port in order to power an active GPS antenna on that port. The second, third, and fourth RF outputs (OUT2, OUT3, and OUT4) would feature a 200Ω DC load to simulate an antenna DC current draw for any receiver connected to those ports.

### FEATURES

- Passes all GPS and GNSS frequencies
- Excellent Gain Flatness
- Gain | L1 - L2 | < 2 dB
- RoHS, REACH, and WEEE Compliant
- CE Certified

### OPTIONS

- Amplified, Passive, and Custom Gain
- Water Proofing, EMI Shielding, Hermetically Sealed, Pass Beacon

*The S14 GPS Splitter comes with many available options to meet specific needs. Please contact GPS Source via phone, email, or visit the website for further information on product options and specifications.*



# 1. S14 Specifications

## 1.1 Electrical Specifications

Table 1-1. Operating Temperature -40°C to 85°C

Parameter			Conditions	Min	Typ	Max	Units
Frequency Range			Ant: Any Port, Unused Ports 50Ω	1.1		1.7	GHz
In/Out Impedance			Ant: OUT1, OUT2, OUT3, OUT4		50		Ω
Gain <sup>(1)(2)</sup>	Standard	Amplified	Ant: Any Port, Unused Ports 50Ω	20	21	22	dB
	Custom	Amplified	Identify (XXdB)	XX - 2	XX	XX + 2	
	As Specified	Amplified by port	OUT1 (J1), OUT2 (J2), OUT3 (J3), OUT4 (J4) XXdB (0 to 20dB) by port	XX - 2	XX	XX + 2	
Loss-Passive <sup>(2)</sup>			Ant: Any Port, Unused Ports 50Ω	6.5	8	9.5	dB
Input SWR <sup>(2)</sup>			All Ports 50Ω			2:1	—
Output SWR <sup>(2)</sup>			All Ports 50Ω			2:1	—
1dB Comp. Pt		Amplified	All Ports 50Ω		-32		dBm
Input IP <sub>3</sub>		Amplified	All Ports 50Ω		-24		dBm
Noise Figure		Amplified	Ant: Any Port, Unused Ports 50Ω			1.8	dB
Gain Flatness <sup>(2)</sup>		Amplified	[L1 – L2] Ant: Any Port, Unused Ports 50Ω			2	dB
		Passive				1	
Amplified Balance			[OUT1 – OUT4] Ant: Any Port, Unused Ports 50Ω			1.0	dB
Phase Balance			Phase (OUT1 – OUT4) Ant: Any Port, Unused Ports 50Ω			1	Degree
Group Delay Flatness			T <sub>d,max</sub> - T <sub>d,min</sub> ; Ant: Any Port			1	ns
Isolation <sup>(1)</sup>	Standard	Amp/Pass	Adjacent Ports: Ant 50Ω	13			dB
			Opposite Ports: Ant 50Ω	21			
	Hi Isolation	Amplified	Adjacent Ports: Ant 50Ω	30			
			Opposite Ports: Ant 50Ω	40			
Current			Current Consumption of device (excludes Ant. Cur.)			16	mA
Max RF Input		Amplified	Max RF Input Without Damage			0	dBm
		Passive				30	

- Notes: 1. Choose custom gain option for improved port-to-port isolation.  
 2. Performance guaranteed for N(F) connectors.

**Table 1-2. Input Voltage**

Parameter		Conditions	Min	Typ	Max	Units
<b>External AC Power</b>	110VAC	Wall Mount Transformer		110		VAC
	230/240 VAC	Wall Mount Transformer (Various international plug opt.)		230		
<b>External DC Power</b>	PDC	Tinned Leads	8		28	VDC
	PM	Two-pin Mil DC connector and mate				
	PMS	Two-pin Mil DC connector and mate				
	PMS38999	Three-pin Mil DC connector, no mate				
<b>Inline Voltage</b> (Amplified/ Passive)	Pass DC	Non-Powered Configuration, Pass DC from OUT1 (J1) to Input	3		16	VDC
	Block DC <sup>(1)</sup>	OUT2 (J2), OUT3 (J3), OUT4 (J4)Block DC standard				

Notes: 1. All DC Blocked outputs include 200 Ohm resistive load to ground standard.

## 2. Performance Data

### 2.1 S14 Active — Standard

Figure 2-1. Active: Gain vs. Frequency


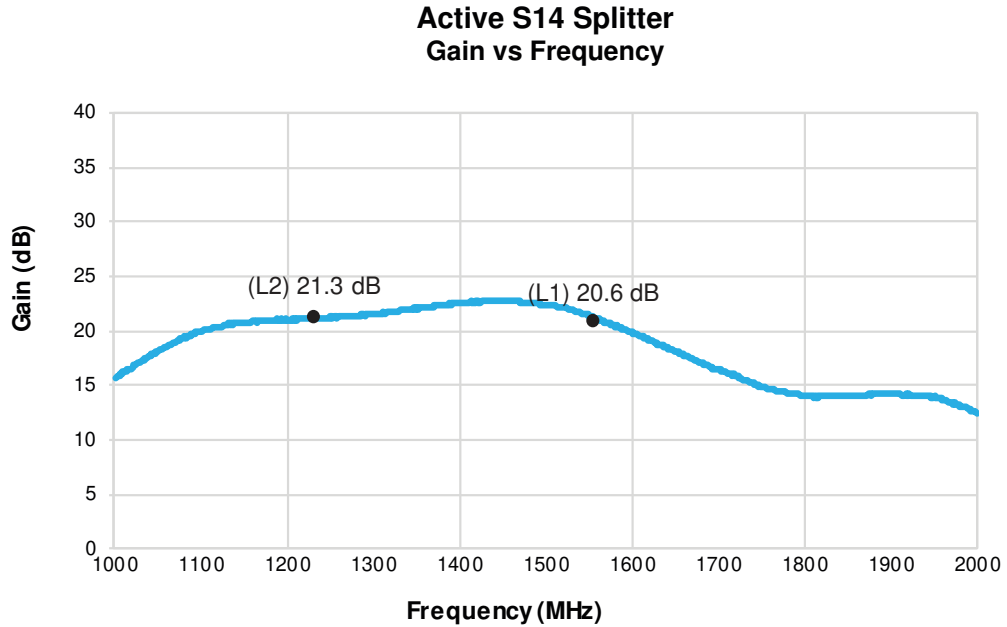


Figure 2-2. Active Input: SWR vs. Frequency

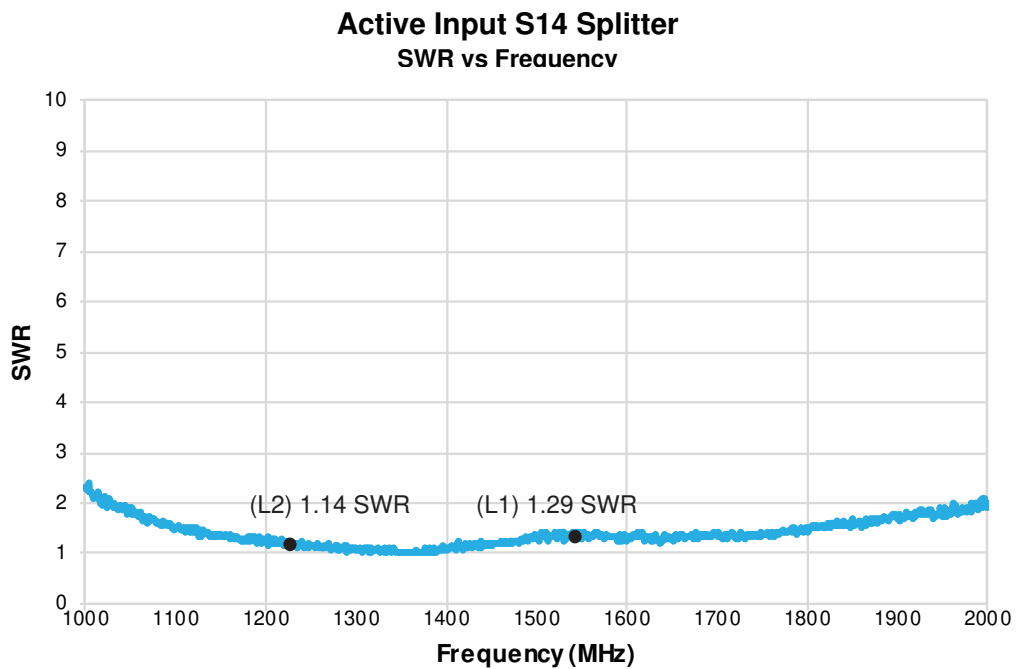

## 2.2 S14 Passive

Figure 2-3. Amplified 0dB (High Isolation): Gain vs. Frequency  
Passive S14 Splitter  
Gain vs Frequency



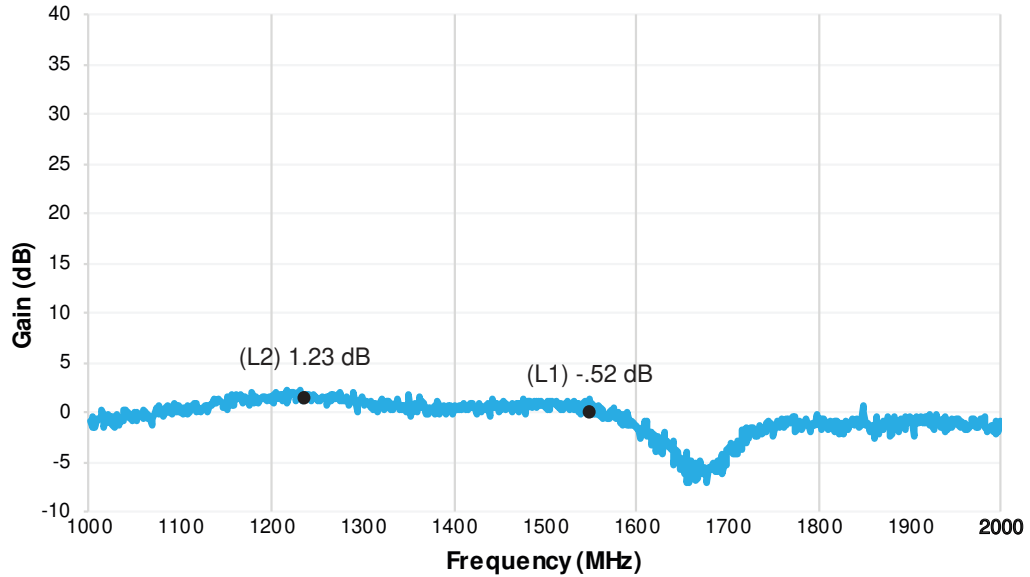


Figure 2-4. Amplified 0dB (High Isolation): SWR vs. Frequency  
Passive Input S14 Splitter  
SWR vs Frequency

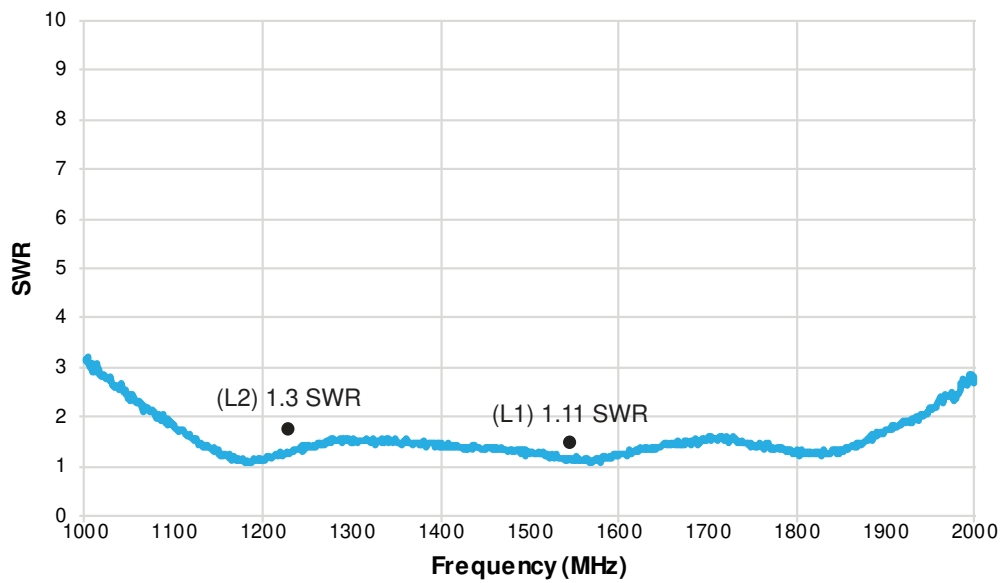

## 2.3 S14 Active or Passive — High Isolation

Figure 2-5. Active or Passive: SWR vs. Frequency

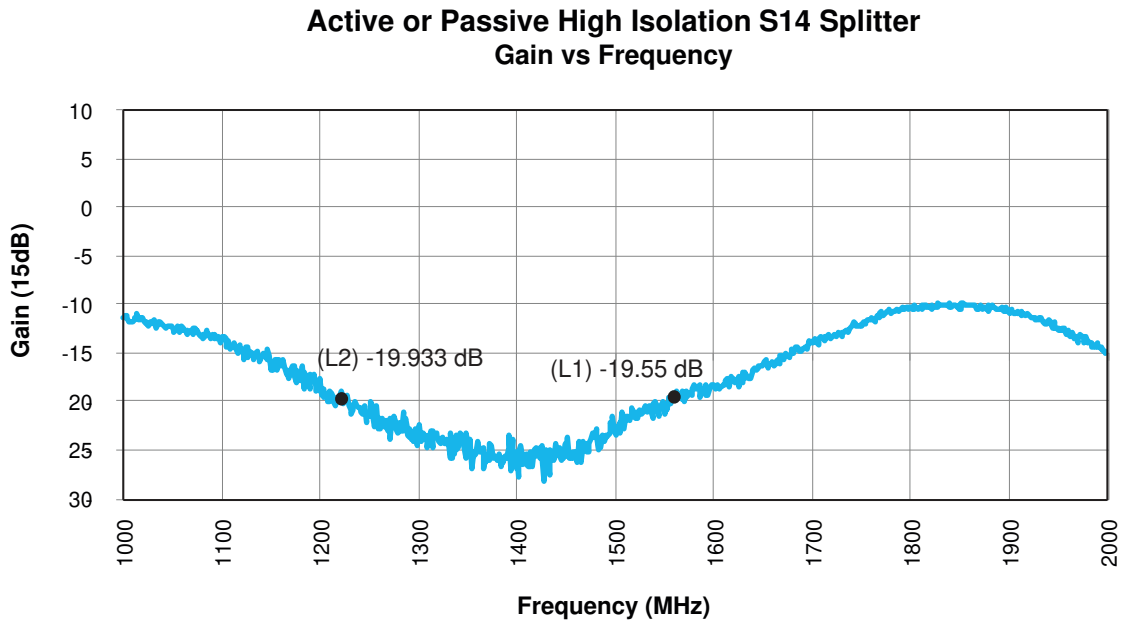


### 3. Product Options

Table 3-1. S14 Available Options

Power Supply			
Source Voltage Options	Voltage Input	Type	
	110VAC	Wall Mount Transformer	
	230VAC	Wall Mount Transformer	
	240VAC (U.K.)	Wall Mount Transformer	
	DC 5VDC to 28VDC	Military Style or tinned leads	
Output Voltage	DC Voltage Out		
	3.3		
	5.0		
	12.0		
	BDC (Block DC)		
RF Connector			
Connector	Connector Type		Limitations
	N	(Female/Male)	N/A
	SMA	(Female/Male)	N/A
	TNC	(Female/Male)	N/A
Housing			
Housings	Housing Type	Limitations	
	Standard	None	
Gain Options			
Gain	Amplified (-A)	Standard amplification is 21dB	
	Custom Gain (-AXX)	Custom gain range is 0 - 20dB	
	Amplified as Specified (-AS)	Provide gain for each port	
	Passive		

## 4. Product Code Decoder

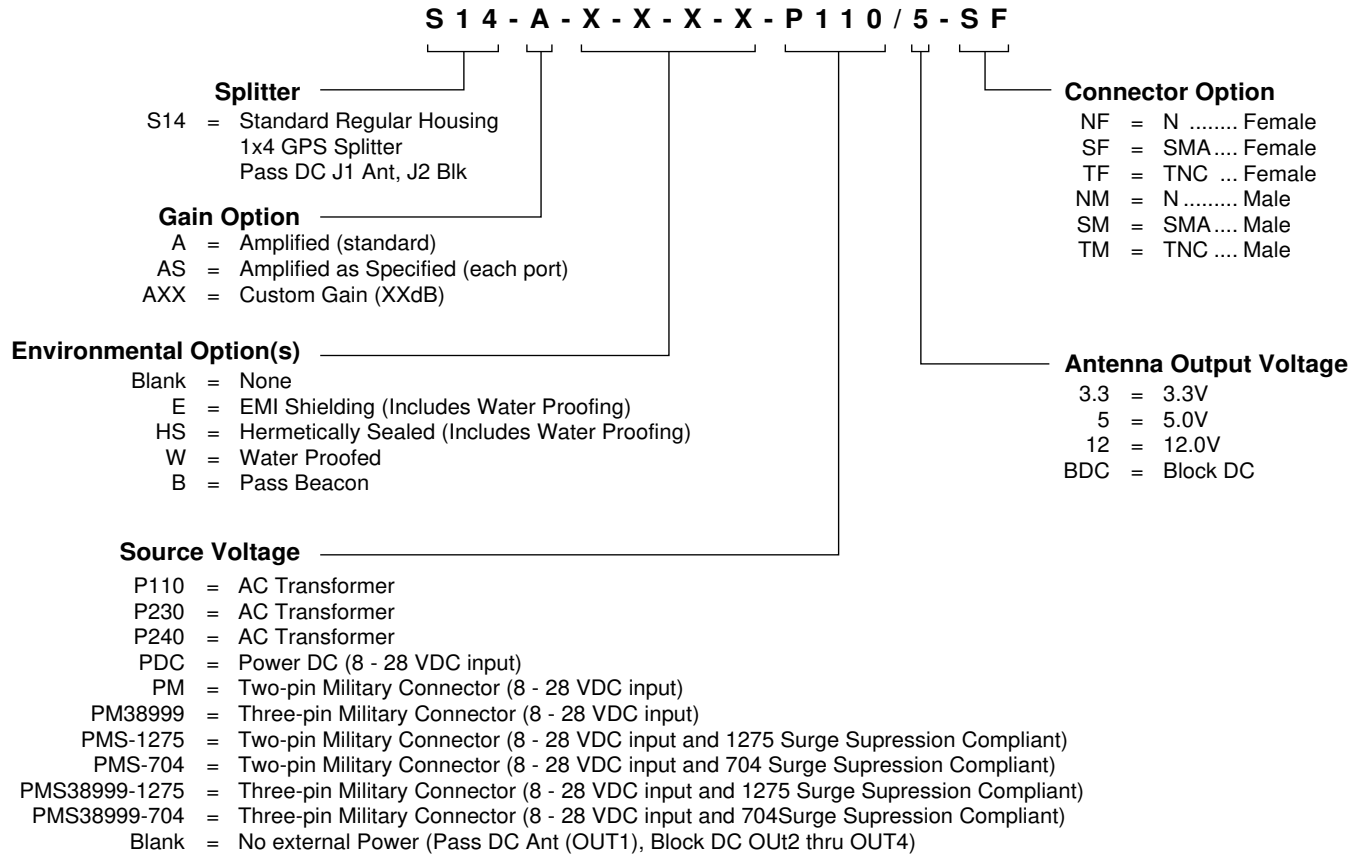

Note: To have product/part codes customized to meet exact needs, contact GPS Source at [GPSS-Sales@gd-ms.com](mailto:GPSS-Sales@gd-ms.com) or visit the website at [www.gpssource.com](http://www.gpssource.com).