

Coach™ II 5G Cellular GNSS Multiband Antenna

Combination Antenna - GNSS, 5G Cellular and Wi-Fi

GL125-DLTEMIMO-SM



Description

5G cellular multiband antenna with multi-GNSS compatibility and 802.11ac MIMO connectivity for Positive Train Control (PTC) networks and high precision location tracking.


Meets EN 50155:2007 requirements for rail and transit installations.

Technologies

- 5G Cellular
- Wi-Fi
- GNSS L1, L2, L5
- GLONASS L1, L2, L3
- GALILEO E5A/E5B/E6
- BEIDOU B1, B2, B3
- QZSS L6

Features

- Covers global GNSS systems
- Proprietary filtering design allows wideband coverage for all GNSS frequencies
- Easy installation and/or replacement
- IP67 compliant design protects against water or dust ingress
- EN 50155:2007; AAR compliant

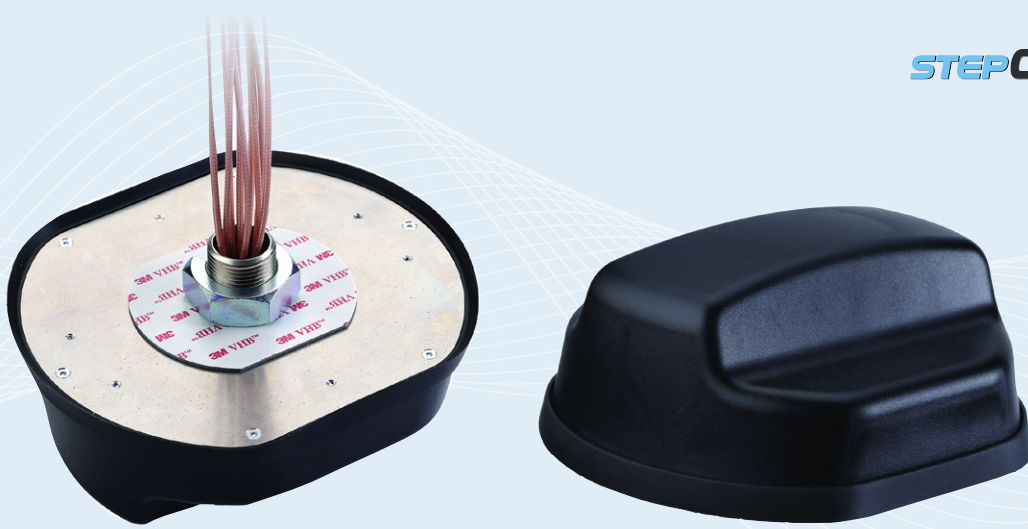

Coach™ II 5G Cellular GNSS Multiband Antenna

Combination Antenna - GNSS, 5G Cellular and Wi-Fi

PCTEL's Coach™ II GL125-DLTEMIMO-SM multiband antenna meets the stringent requirements of complex RF communication systems in rail transportation applications. This antenna features two 4G LTE elements that facilitate the high-speed data transmissions needed in dense RF environments used for Positive Train Control (PTC) networks. The platform incorporates dual band 802.11ac Wi-Fi MIMO connectivity with two Wi-Fi elements. PCTEL's proprietary high-rejection, multi-constellation GNSS L1 L2 L5 technology is included for high precision location tracking. This antenna platform also meets EN 50155:2007 and AAR requirements for ITS rail and roadway applications.

Features

- Full multi-GNSS compatibility – covers global GNSS Systems
- Superior out-of-band rejection – proprietary filtering design allows wideband coverage for all GNSS frequencies
- Easy installation and/or replacement – metal stud mount with slotted jam nut provides single cable exit
- Withstands severe environmental conditions – IP67 compliant design with custom overmolded gasket protects against water or dust ingress
- Meets EN 50155:2007 and AAR certification requirements for rail applications

Certifications



RoHS
COMPLIANT

SPECIFICATIONS

Coach™ II 5G Cellular GNSS Multiband Antenna

Combination Antenna - GNSS, 5G Cellular and Wi-Fi

Standard Configurations

Model	Elements	Cable	Connector	Mount
GL125-DLTEMIMO-SM	LTE (All Ports) Wi-Fi (All Ports) GNSS	Two 2-ft RG-316 Two 2-ft RG-316 One 2-ft RG-316	SMA Plug (Male) Reverse Polarity SMA Plug (Male) SMA Plug (Male)	1-inch OD, 3/4-inch long (.75") zinc stud mount with jam nut (all models)

Electrical Specifications – RF Antennas

F1 (MHz)	F2 (MHz)	Max VSWR ¹	Gain (dB) ¹			Efficiency ¹		Polarization	Nominal Impedance	Maximum Power
			Max	Typical	Range (±)	Avg	Range (±)			
LTE*										
600	698	< 4.5	3.0	1.6	1.4	40%	10%	Linear, vertical	50 ohms	25 watts
698	802	< 3.0	4.0	2.5	1.5	53%	9%			
824	960	< 2.0	4.0	3.0	1	50%	6%			
1710	2200	< 2.0	6.0	5.0	1	62%	5%			
2300	2690	< 2.0	7.0	6.0	1	65%	4%			
3400	3800	< 2.0	6.5	6.0	0.5	62%	2%			
5150	5950	< 2.0	6.0	5.5	0.5	54%	3%			
Wi-Fi*										
2400	2500	< 2.0	6.8	6.0	0.8	60%	5%	Linear, vertical	50 ohms	25 watts
4900	5925	< 2.5	8.0	6.4	1.6	45%	15%			
5925	7150	< 3.0	8.0	6.0	2.5	47%	10%			

*AUT measured on a 2ft ground plane with 3ft of RG316 cable

Minimum Isolation (dB)

Elements	LTE Primary (1&3)		Wi-Fi	
LTE	600-960 MHz	11.5	600-960 MHz	20.0
	1.71-2.7 GHz	23.0	1.71-2.7 GHz	17.0
	3.3-3.8 GHz	24.0	3.3-3.59 GHz	35.0
	5.15-5.925 GHz	24.0	3.3-3.59 GHz	35.0
			5.95-7.15 GHz	35.0
Wi-Fi			2.4-2.5 GHz	19.0
			4.9-5.9 GHz	30.0
			5.95-7.15 GHz	30.0

¹ Measurements taken with 3-ft cables and no ground plane.

SPECIFICATIONS

Coach™ II 5G Cellular GNSS Multiband Antenna

Combination Antenna - GNSS, 5G Cellular and Wi-Fi

Electrical Specifications – GNSS Antenna (all bands)

Specification	Measurement
Frequency Range	1150-1290 MHz 1500-1615 MHz
LNA Gain	40dB±3 dB
Nominal Impedance	50 ohms
Polarization	Right hand circular
ESD	> 15kV
VSWR	< 3.0 (L2-L5 bands) < 2.5 (L1 band)
Noise Figure	3.0 dB (typical)
Nominal Gain	3 dBic @ 90° -2 dBic @ 20°
DC Voltage	2.5-12.0 VDC
DC Current	37mA (typical) < 50mA (max.)
Out-of-Band Rejection	< 1050MHz > 80 dB <1450MHz > 70 dB < 1125MHz > 30 dB > 1690MHz > 30 dB > 1350MHz > 70 dB > 1730MHz > 80 dB

Electrical Specifications – GNSS Antenna

Band	Gain @ 10° Elevation	Gain @ 90° Elevation	Axial Ratio @ 90° Elevation
GPS L1	-5 dBic	2 dBic	≤ 2.5 dB
GPS L2	-6 dBic	3 dBic	
GPS L5	-7 dBic	1 dBic	
GLONASS L1	-7 dBic	0 dBic	
GLONASS L2	-8 dBic	0 dBic	
GLONASS L3	-4 dBic	3 dBic	
GALILEO E1	-5 dBic	2 dBic	
GALILEO E5	-4 dBic	3 dBic	
GALILEO E6	-4 dBic	3 dBic	
BEIDOU B1	-4 dBic	3 dBic	
BEIDOU B1-2	-4 dBic	3 dBic	
BEIDOU B2	-5 dBic	2 dBic	
BEIDOU B3	-8 dBic	0 dBic	
QZSS L6	-4 dBic	3 dBic	

SPECIFICATIONS

Coach™ II 5G Cellular GNSS Multiband Antenna

Combination Antenna - GNSS, 5G Cellular and Wi-Fi

Mechanical and Environmental Specifications

All Models

Dimensions (W x H)	5.1 W x 3.6 H in (130 W x 92 H mm)
Weight	2.3 lbs (1.04 kg)
Housing Material	Black, UV-Stable Rugged Thermoplastics
Temperature Range	-40°C to +85°C

CONTACT US

**For more information about
this product contact your
sales representative or visit
> www.stepglobal.com**

**Engineered Solutions for Real Time
Management of Mobile Assets**

Step Global has been providing innovative GPS & RFID solutions for our customers for over 20 years. We supply a broad range of technology products from globally recognised manufacturers. We provide Antennas, Asset Tracking, Precision Timing, GNSS Signal Distribution and Simulation and more, to satisfy all your assets tracking and monitoring needs.



www.stepglobal.com
+61 3 9551 7334
sales@stepglobal.com

1 Arco Lane
Heatherton, Vic
3202 Australia